

## PINO



**M**inimalist profile with just 5mm trim blends seamlessly with ceilings, a versatile down light family with round and square shapes have fixed and adjustable options, a massive choice of reflectors and colours which is ideal for hospitality, residential, commercial and retail applications, deep LED source with 35° cut-off angle for anti-dazzling and provides visual comfort, various beam angles from very narrow 10° to wide beam 50°, custom solutions available upon request.

**Material-** Die-cast aluminium body

**Reflector-** vacuum electroplated for specular aluminium


**Finish-** Trim in white powder coat, black as an option

**Efficacy-** 58 - 81lm/W

**Input voltage-** 240V 50/60Hz

**Dimming-** Dali, DSI, 1-10V as an option

**Life:** 50,000 Hours L80 B10

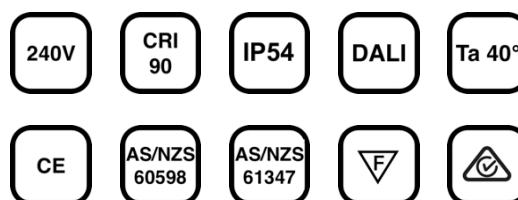




**Model number: PI-R-F-8W-24-30K-BK-S**

Shape	Adjustability	Wattage	Beam angle	CCT	Reflector	Controls
R: Round S: Square	F: Fixed A: Adjustable	5W 8W 10W 12W	10° 15° 18° 24° 36° 50°	2700K 3000K 4000K 5000K	B: Black S: Silver G: Gold P: Pinhole W: White H: Honeycomb	S: Standard A: 1-10V D: DALI Dimming S: DSI dimming T: Triac E: Emergency

**Optical Accessories**



## Dimensions

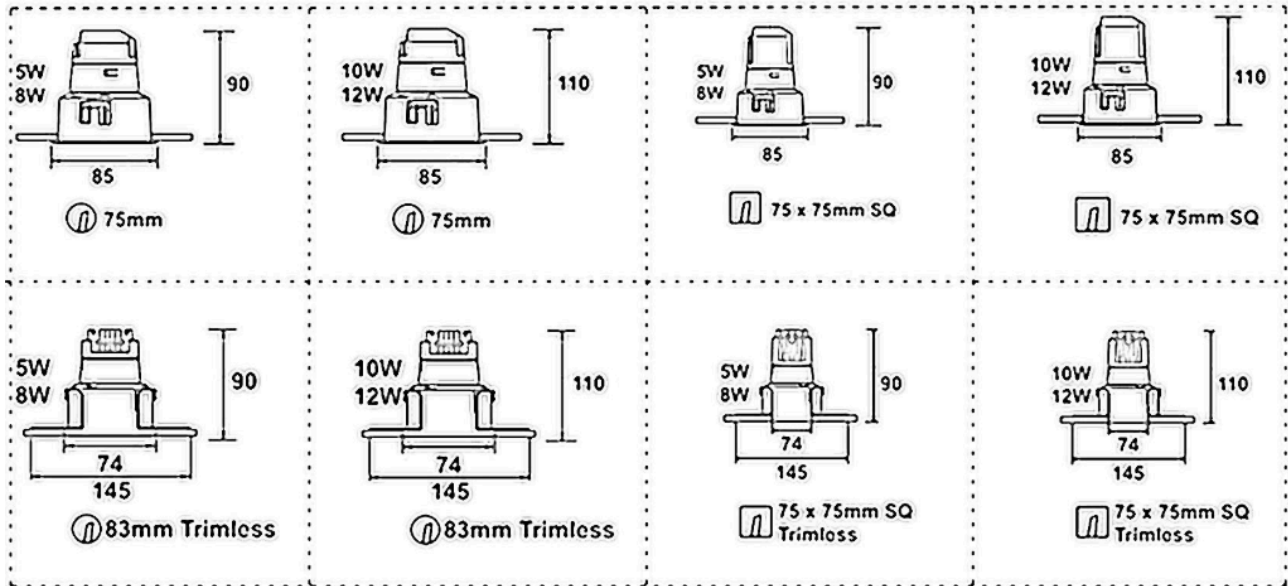

SDCM<3



Excellent thermal management



EMC - optimised



Different light distributions



DALI dimming



Different dimming



cut-off 35°



IP level



Horizontal 360°



25° Vertical 25°



Different color temperatures



Deep anti-dazzle

